


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.30 lm/W			
MODEL	3CCT	I _{max} (cd)	714.0	S/MH (C0/180)	0.97
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.99
RATED VOLTAGE (V)	232	TOTAL FLUX (lm)	868.43	η UP,DN (C0-180)	0.2,59.2
NOMINAL FLUX (lm)	868.427	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3,40.2
LAMPS INSIDE	1	η up (%)	0.5	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	231.2	η down (%)	99.5	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

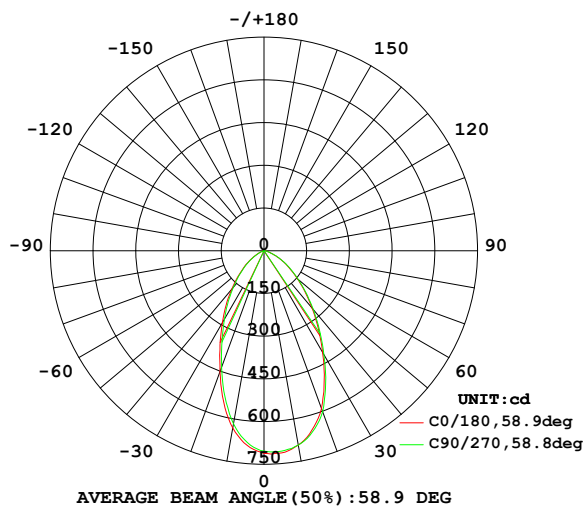

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

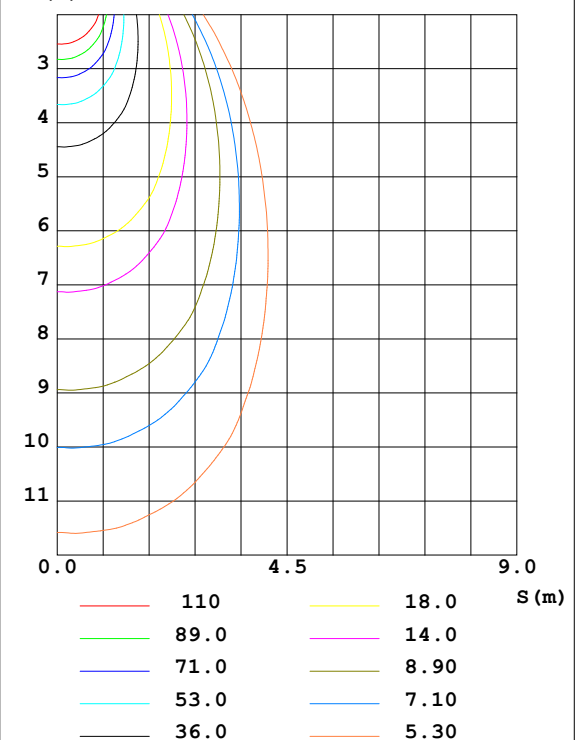


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	693.0	709.0	692.9	674.3	631.7	651.9	617.6	580.7	0- 10	64.90	64.90	7.47,7.47
20	589.8	641.3	601.7	548.5	452.0	441.2	436.1	446.8	10- 20	165.8	230.7	26.6,26.6
30	412.3	416.8	421.2	418.9	293.1	276.6	278.3	302.0	20- 30	198.3	429.0	49.4,49.4
40	263.0	259.6	269.3	279.4	176.5	168.3	167.9	179.7	30- 40	176.4	605.5	69.7,69.7
50	153.6	150.7	157.5	159.9	94.21	87.18	89.66	92.67	40- 50	129.7	735.2	84.7,84.7
60	80.79	77.76	83.42	81.94	39.05	32.48	36.91	37.75	50- 60	79.14	814.3	93.8,93.8
70	29.44	25.90	29.86	27.21	12.06	11.92	11.64	12.06	60- 70	36.37	850.7	98,98
80	7.720	8.056	8.290	7.723	1.152	1.120	1.134	1.190	70- 80	11.39	862.1	99.3,99.3
90	0.6332	0.6509	0.6404	0.6051	0.0707	0.0740	0.0706	0.0671	80- 90	1.691	863.8	99.5,99.5
100	0.0599	0.0599	0.0599	0.0635	0.1587	0.1447	0.1552	0.1587	90-100	0.1346	863.9	99.5,99.5
110	0.1480	0.1549	0.1478	0.1550	0.3103	0.3032	0.3173	0.3138	100-110	0.1704	864.1	99.5,99.5
120	0.3349	0.3242	0.3313	0.3349	0.5679	0.5538	0.5749	0.5784	110-120	0.3257	864.4	99.5,99.5
130	0.6202	0.5814	0.5884	0.6237	0.9380	0.9239	0.9451	0.9415	120-130	0.5347	864.9	99.6,99.6
140	1.026	0.9729	0.9764	1.015	1.407	1.414	1.425	1.386	130-140	0.7534	865.7	99.7,99.7
150	1.519	1.477	1.473	1.487	1.925	1.939	1.950	1.893	140-150	0.9052	866.6	99.8,99.8
160	2.034	1.978	1.992	2.013	2.394	2.352	2.398	2.363	150-160	0.8964	867.5	99.9,99.9
170	2.464	2.383	2.429	2.464	2.747	2.733	2.694	2.704	160-170	0.6714	868.2	100,100
180	2.761	2.757	2.746	2.753	2.768	2.761	2.757	2.761	170-180	0.2542	868.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

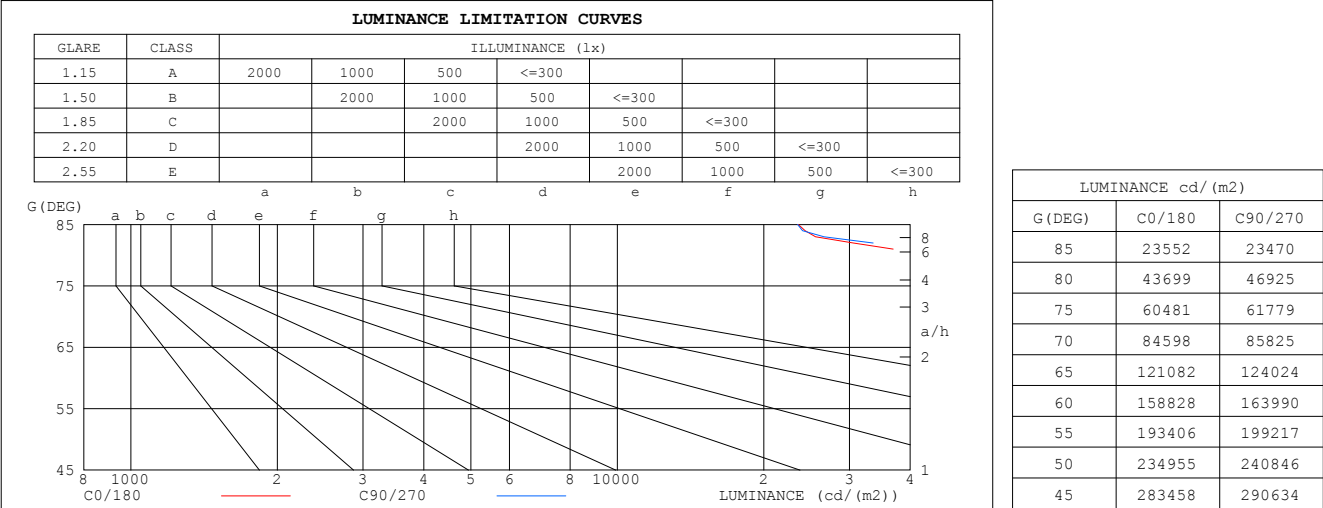


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.08	1.05	1.03	1.06	1.03	1.01	1.02	.00	.98	.98	.96	.95	.94	.93	.92	.90
2.0	.98	.93	.89	.97	.92	.88	.93	.89	.86	.90	.87	.84	.87	.84	.82	.80
3.0	.90	.83	.78	.88	.82	.78	.85	.80	.76	.83	.78	.75	.80	.77	.74	.72
4.0	.82	.75	.70	.81	.74	.69	.78	.73	.68	.76	.71	.67	.74	.70	.67	.65
5.0	.75	.68	.63	.74	.67	.62	.72	.66	.62	.70	.65	.61	.68	.64	.60	.59
6.0	.69	.62	.57	.68	.61	.57	.67	.61	.56	.65	.60	.56	.64	.59	.55	.53
7.0	.64	.57	.52	.63	.56	.52	.62	.56	.51	.60	.55	.51	.59	.54	.51	.49
8.0	.60	.52	.48	.59	.52	.47	.58	.52	.47	.56	.51	.47	.55	.50	.47	.45
9.0	.56	.49	.44	.55	.48	.44	.54	.48	.44	.53	.47	.43	.52	.47	.43	.42
10.0	.52	.45	.41	.51	.45	.41	.51	.45	.40	.50	.44	.40	.49	.44	.40	.39

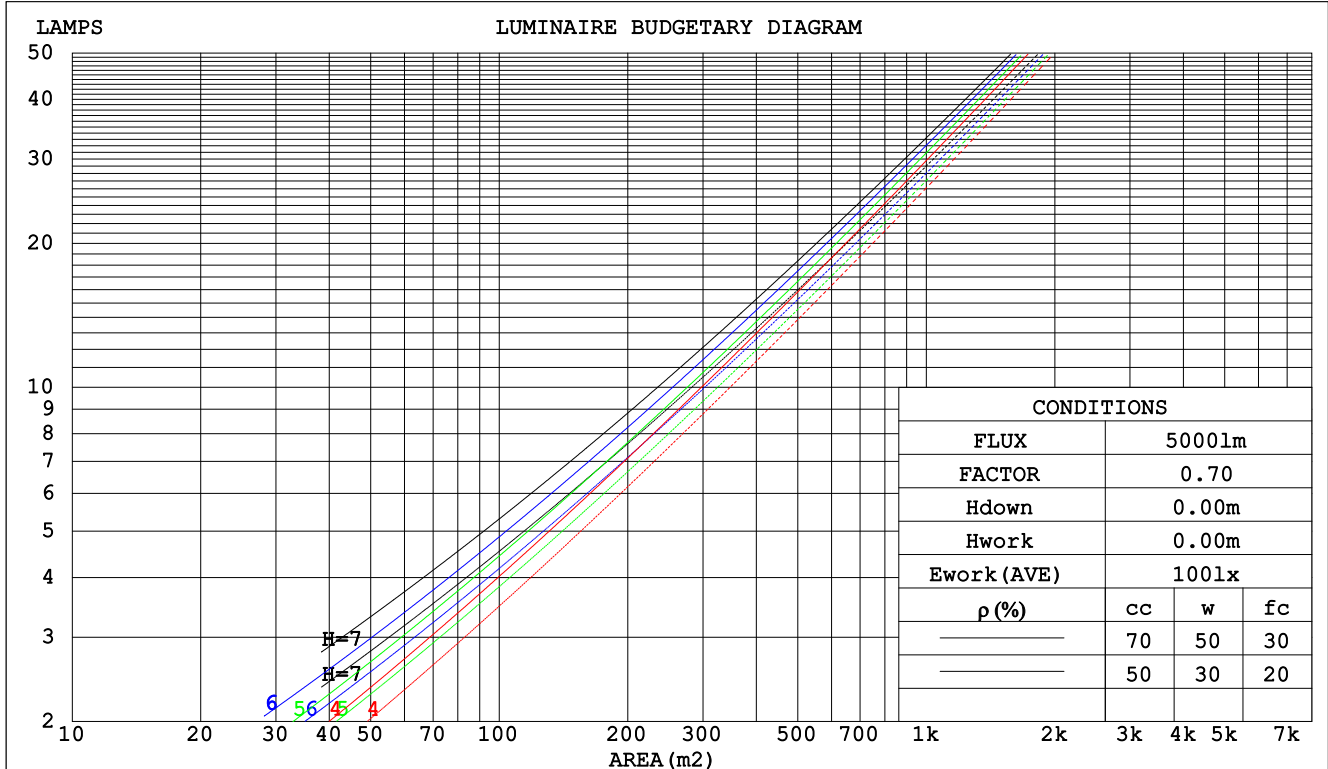

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm								
NAME: MAGIC-8W-SMD				TYPE:2700K			WEIGHT:	
DIM.:				SPEC.:			SERIAL No.:	
MFR.:				SUR.:			PROTECTION ANGLE:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.221	.126	.040	.214	.122	.039	.201	.115	.037	.189	.109	.035	.178	.103	.033	
2.0	.214	.117	.036	.208	.115	.035	.197	.110	.034	.187	.105	.033	.177	.100	.032	
3.0	.204	.109	.033	.199	.106	.032	.189	.102	.031	.180	.099	.030	.171	.095	.029	
4.0	.193	.100	.029	.188	.099	.029	.180	.095	.028	.172	.092	.028	.164	.089	.027	
5.0	.182	.093	.027	.178	.091	.027	.171	.089	.026	.164	.086	.026	.157	.084	.025	
6.0	.172	.086	.025	.169	.085	.025	.162	.083	.024	.156	.081	.024	.150	.079	.023	
7.0	.163	.081	.023	.160	.080	.023	.154	.078	.022	.148	.076	.022	.143	.074	.022	
8.0	.154	.075	.021	.151	.075	.021	.146	.073	.021	.141	.071	.021	.136	.070	.020	
9.0	.146	.071	.020	.144	.070	.020	.139	.069	.019	.134	.067	.019	.130	.066	.019	
10.0	.139	.067	.019	.137	.066	.018	.132	.065	.018	.128	.064	.018	.124	.063	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.195	.195	.195	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.178	.161	.146	.153	.138	.125	.104	.095	.087	.060	.055	.050	.019	.018	.016	
2.0	.166	.136	.112	.142	.117	.096	.097	.081	.067	.056	.047	.039	.018	.015	.013	
3.0	.156	.118	.088	.134	.102	.076	.092	.071	.053	.053	.041	.031	.017	.013	.010	
4.0	.147	.104	.071	.126	.090	.062	.087	.063	.043	.050	.037	.026	.016	.012	.008	
5.0	.139	.093	.059	.120	.080	.051	.082	.056	.036	.048	.033	.021	.015	.011	.007	
6.0	.132	.084	.049	.114	.073	.043	.079	.051	.030	.046	.030	.018	.015	.010	.006	
7.0	.126	.077	.042	.108	.067	.037	.075	.047	.026	.044	.028	.016	.014	.009	.005	
8.0	.120	.071	.037	.104	.061	.032	.072	.043	.023	.042	.025	.014	.013	.008	.005	
9.0	.115	.066	.033	.099	.057	.029	.069	.040	.020	.040	.024	.012	.013	.008	.004	
10.0	.110	.062	.029	.095	.053	.026	.066	.038	.018	.038	.022	.011	.012	.007	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Bob
 Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
 Humidity:65.0%
 Test Distance:7.030m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm											
NAME: MAGIC-8W-SMD					TYPE:2700K			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:			
MFR.:					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.5	31.7	30.8	31.9	32.1	30.6	31.8	30.9	32.0	32.2	
	3H	30.9	32.0	31.1	32.2	32.4	31.0	32.1	31.3	32.3	32.5
	4H	30.9	31.9	31.2	32.2	32.4	31.0	32.1	31.3	32.3	32.5
	6H	30.9	31.9	31.2	32.2	32.4	31.0	32.0	31.4	32.3	32.5
	8H	30.9	31.8	31.2	32.1	32.4	31.0	31.9	31.3	32.2	32.5
	12H	30.9	31.7	31.2	32.0	32.3	31.0	31.9	31.3	32.1	32.4
4H	2H	30.7	31.7	31.0	31.9	32.2	30.8	31.8	31.1	32.0	32.3
	3H	31.1	32.0	31.4	32.3	32.6	31.2	32.1	31.5	32.4	32.7
	4H	31.2	32.0	31.6	32.3	32.7	31.3	32.1	31.7	32.4	32.8
	6H	31.3	32.0	31.7	32.3	32.7	31.4	32.1	31.8	32.4	32.8
	8H	31.3	31.9	31.7	32.3	32.7	31.4	32.0	31.8	32.4	32.8
	12H	31.2	31.8	31.6	32.2	32.6	31.3	31.9	31.7	32.3	32.7
8H	4H	31.2	31.8	31.6	32.2	32.6	31.3	31.9	31.7	32.3	32.7
	6H	31.3	31.8	31.7	32.2	32.7	31.4	31.9	31.8	32.3	32.8
	8H	31.3	31.8	31.7	32.2	32.6	31.4	31.9	31.8	32.3	32.7
	12H	31.3	31.7	31.7	32.1	32.6	31.4	31.8	31.8	32.2	32.7
12H	4H	31.2	31.8	31.6	32.1	32.5	31.2	31.8	31.7	32.2	32.6
	6H	31.3	31.7	31.7	32.2	32.6	31.4	31.8	31.8	32.3	32.7
	8H	31.3	31.7	31.7	32.1	32.6	31.4	31.8	31.8	32.2	32.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.7 / - 1.0					+ 0.7 / - 1.0					
1.5H	+ 0.5 / - 0.5					+ 0.5 / - 0.5					
2.0H	+ 1.4 / - 1.5					+ 1.5 / - 1.5					

CIE Pub.117 Corrected 868.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.5)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	72	63	58	72	63	58	71	63	58	53
0.80	82	73	68	81	73	67	79	72	67	62
1.00	89	81	75	88	80	75	86	81	75	69
1.25	95	87	82	93	86	82	91	85	81	75
1.50	98	92	87	97	91	86	94	89	85	79
2.00	103	97	93	101	96	92	98	94	90	84
2.50	106	100	96	104	99	95	100	96	93	86
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	104	108	105	102	105	102	99	92
5.00	112	109	106	110	107	105	106	104	102	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Bob
 Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
 Humidity:65.0%
 Test Distance:7.030m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

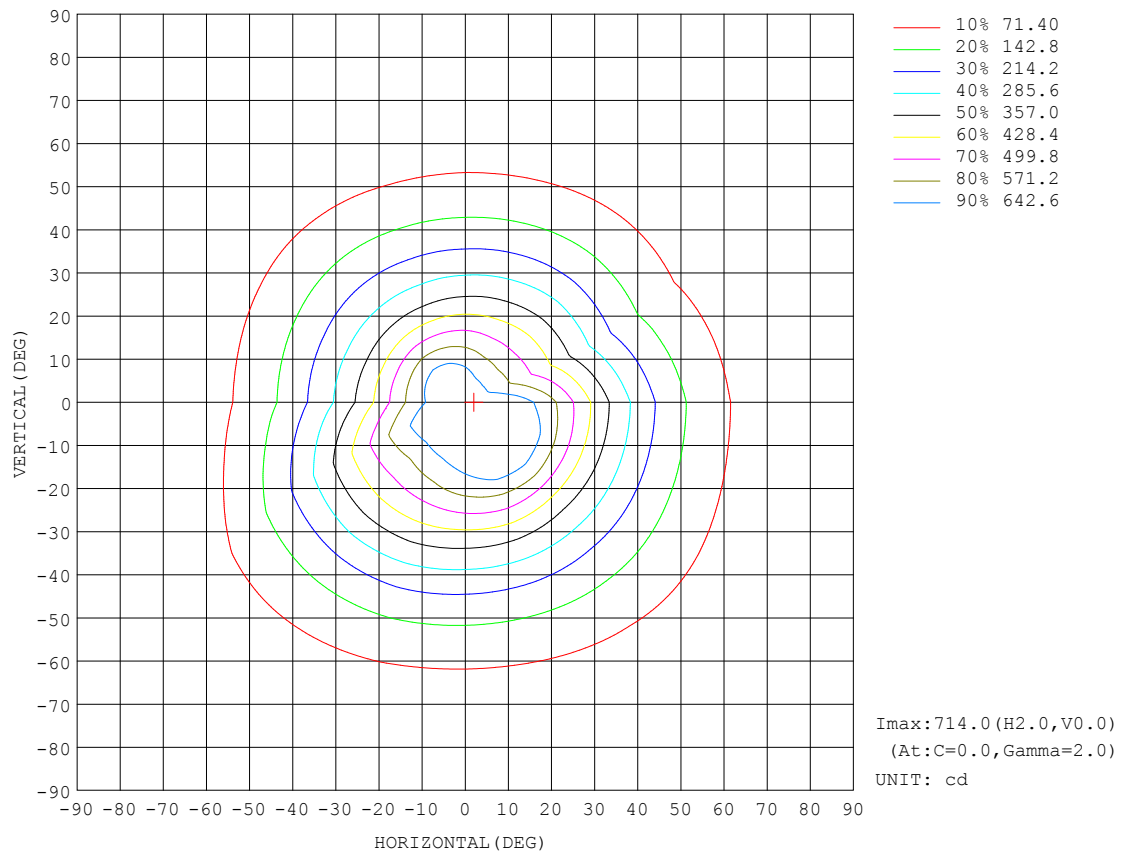


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

AAI CURVES

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

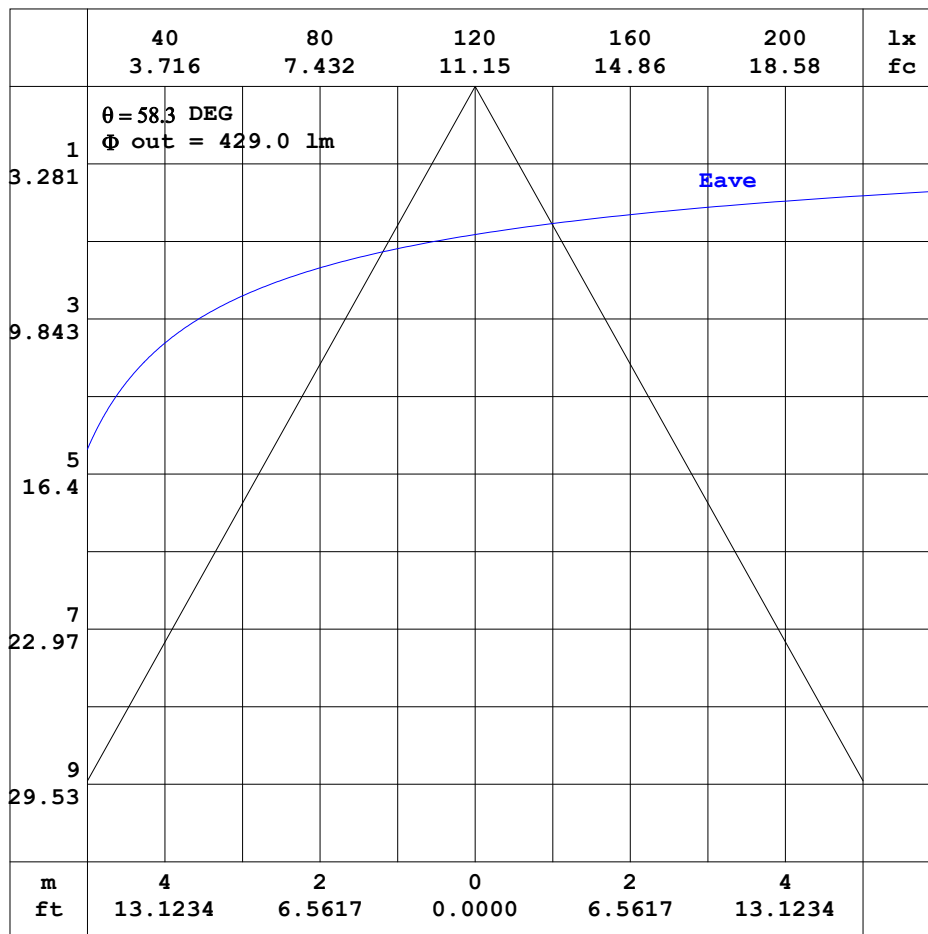


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Bob
 Test Date: 2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.270
 Humidity: 65.0%
 Test Distance: 7.030m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm		
NAME: MAGIC-8W-SMD	TYPE:2700K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

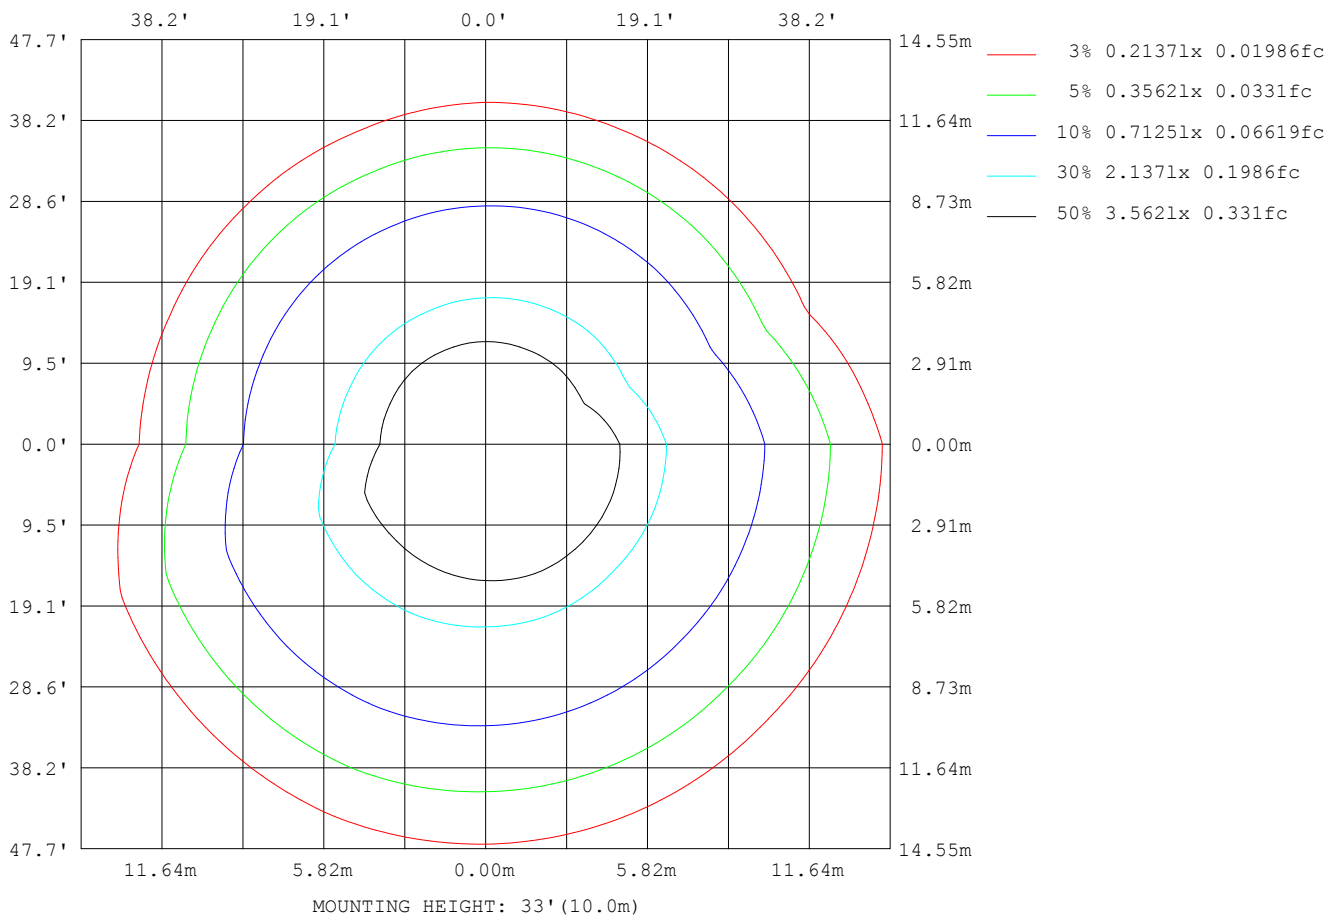

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

Planar Illuminance Curve

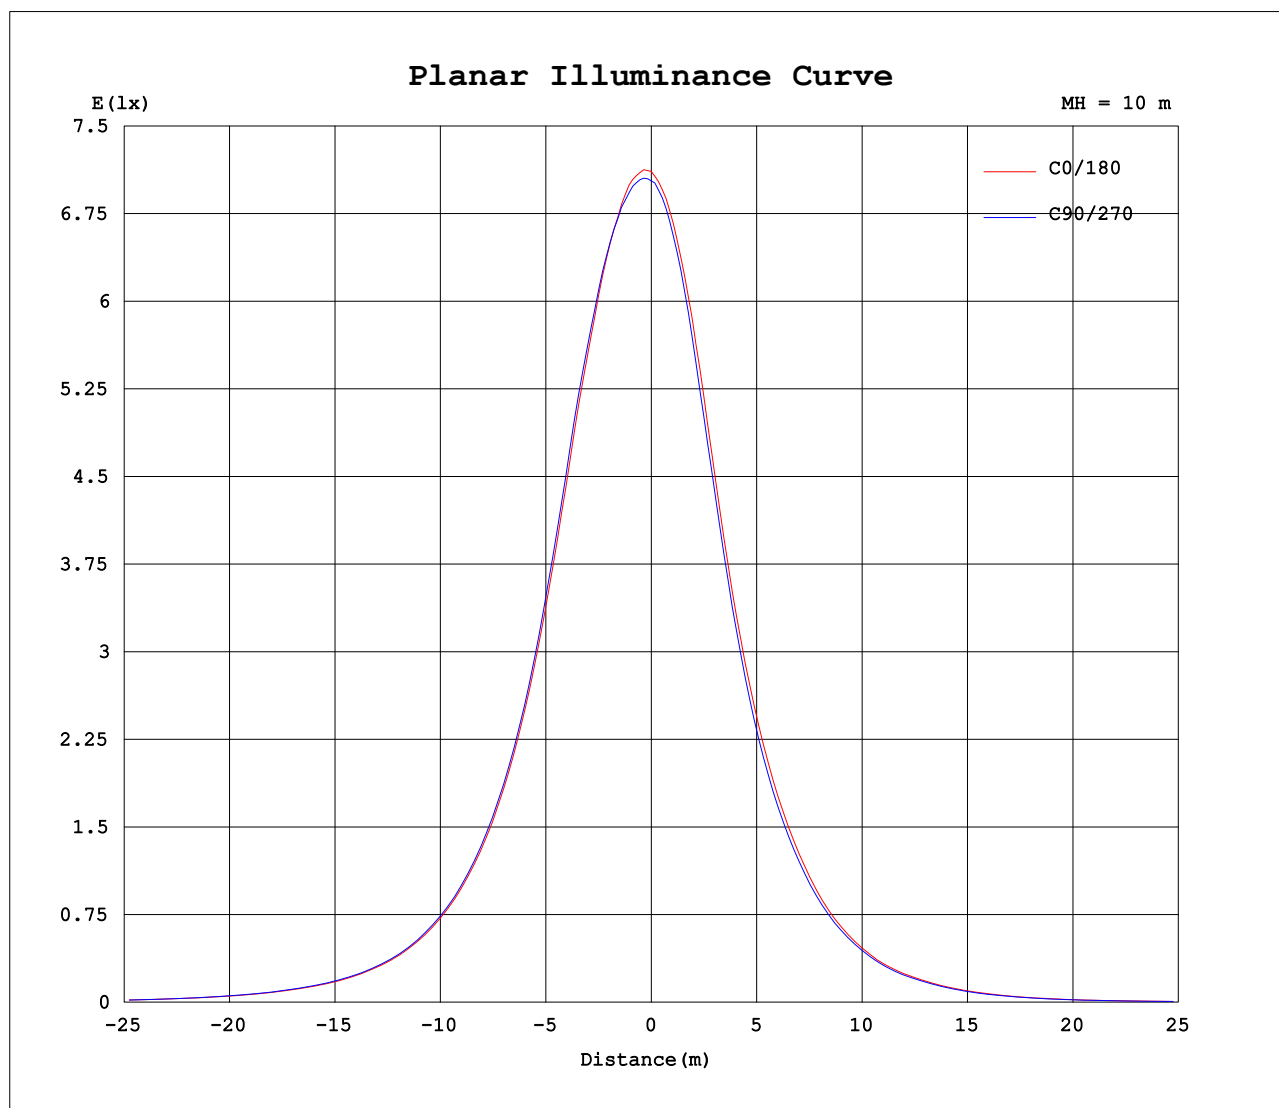

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Bob
Test Date: 2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity: 65.0%
Test Distance: 7.030m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.3V I:0.0383A P:8.019W PF:0.9042 Lamp Flux:868.427x1 lm																	
NAME: MAGIC-8W-SMD									TYPE:2700K						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:		
MFR.:									SUR.:						PROTECTION ANGLE:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	711	713	713	710	703	697	694	695	711	713	713	710	703	697	694	695			
5	712	712	710	708	707	706	703	705	685	697	704	695	676	656	650	651			
10	693	705	709	704	693	681	674	681	632	643	652	639	618	591	581	587			
15	651	681	690	685	658	631	615	629	549	547	553	540	530	517	514	522			
20	590	624	641	632	602	568	548	561	452	442	441	435	436	437	447	449			
25	501	519	528	528	513	497	486	485	366	352	347	344	349	359	372	376			
30	412	416	417	425	421	423	419	408	293	281	277	274	278	288	302	303			
35	332	331	328	336	339	349	347	334	232	223	221	217	220	228	238	238			
40	263	261	260	266	269	278	279	268	176	171	168	166	168	173	180	182			
45	204	200	199	204	209	216	213	207	132	126	126	124	126	129	133	135			
50	154	152	151	154	158	163	160	155	94.2	89.1	87.2	86.3	89.7	90.5	92.7	95.3			
55	113	111	110	113	116	118	114	110	64.9	59.7	57.2	57.6	61.4	62.0	64.1	65.6			
60	80.8	80.2	77.8	81.2	83.4	85.3	81.9	79.9	39.1	34.5	32.5	33.2	36.9	37.0	37.7	39.0			
65	52.1	50.7	48.0	51.0	53.3	54.4	51.3	50.4	21.2	19.4	19.1	18.9	20.0	20.1	20.1	20.9			
70	29.4	27.9	25.9	27.7	29.9	30.0	27.2	27.6	12.1	11.8	11.9	11.6	11.6	11.6	12.1	12.2			
75	15.9	16.3	16.2	16.6	16.3	16.4	15.5	15.2	3.85	3.39	3.33	3.18	3.38	3.40	3.77	3.87			
80	7.72	8.24	8.06	8.62	8.29	8.38	7.72	7.51	1.15	1.11	1.12	1.10	1.13	1.14	1.19	1.20			
85	2.09	2.16	2.07	2.15	2.08	2.14	1.95	1.93	0.15	0.13	0.12	0.11	0.12	0.14	0.16	0.19			
90	0.63	0.65	0.65	0.66	0.64	0.63	0.61	0.58	0.07	0.06	0.07	0.06	0.07	0.06	0.07	0.06			
95	0.06	0.07	0.06	0.06	0.06	0.06	0.06	0.07	0.11	0.07	0.10	0.06	0.11	0.07	0.11	0.07			
100	0.06	0.08	0.06	0.08	0.06	0.09	0.06	0.10	0.16	0.11	0.14	0.12	0.16	0.14	0.16	0.11			
105	0.10	0.12	0.10	0.12	0.10	0.12	0.10	0.13	0.22	0.18	0.22	0.18	0.22	0.19	0.23	0.19			
110	0.15	0.18	0.15	0.18	0.15	0.18	0.16	0.19	0.31	0.27	0.30	0.27	0.32	0.28	0.31	0.29			
115	0.23	0.25	0.22	0.25	0.22	0.25	0.23	0.28	0.43	0.38	0.41	0.39	0.43	0.40	0.43	0.39			
120	0.33	0.36	0.32	0.35	0.33	0.36	0.33	0.38	0.57	0.54	0.55	0.54	0.57	0.55	0.58	0.54			
125	0.46	0.48	0.44	0.46	0.44	0.48	0.46	0.50	0.74	0.69	0.72	0.70	0.74	0.72	0.75	0.70			
130	0.62	0.62	0.58	0.60	0.59	0.63	0.62	0.66	0.94	0.90	0.92	0.91	0.95	0.92	0.94	0.90			
135	0.81	0.80	0.76	0.78	0.77	0.81	0.81	0.85	1.17	1.13	1.16	1.15	1.18	1.15	1.16	1.11			
140	1.03	1.02	0.97	0.99	0.98	1.02	1.02	1.05	1.41	1.38	1.41	1.40	1.42	1.39	1.39	1.34			
145	1.27	1.26	1.22	1.23	1.22	1.25	1.25	1.29	1.67	1.65	1.69	1.67	1.69	1.65	1.64	1.59			
150	1.52	1.52	1.48	1.49	1.47	1.49	1.49	1.53	1.93	1.90	1.94	1.93	1.95	1.91	1.89	1.84			
155	1.79	1.77	1.73	1.75	1.74	1.75	1.74	1.79	2.17	2.14	2.15	2.16	2.19	2.16	2.14	2.09			
160	2.03	2.02	1.98	2.00	1.99	2.01	2.01	2.05	2.39	2.36	2.35	2.36	2.40	2.39	2.36	2.32			
165	2.26	2.24	2.19	2.22	2.22	2.25	2.25	2.29	2.59	2.56	2.55	2.52	2.55	2.55	2.55	2.51			
170	2.46	2.43	2.38	2.42	2.43	2.46	2.46	2.50	2.75	2.73	2.73	2.69	2.69	2.69	2.70	2.66			
175	2.63	2.61	2.59	2.61	2.61	2.63	2.64	2.67	2.82	2.81	2.82	2.81	2.79	2.77	2.79	2.75			
180	2.76	2.76	2.76	2.76	2.75	2.75	2.75	2.76	2.77	2.76	2.76	2.76	2.76	2.75	2.76	2.76			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks: