


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 110.84 lm/W			
MODEL	3CCT	I _{max} (cd)	704.2	S/MH (C0/180)	0.95
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.96
RATED VOLTAGE (V)	232	TOTAL FLUX (lm)	885.87	η UP,DN (C0-180)	0.2, 58.3
NOMINAL FLUX (lm)	885.866	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.3, 41.2
LAMPS INSIDE	1	η up (%)	0.5	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	231.5	η down (%)	99.5	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

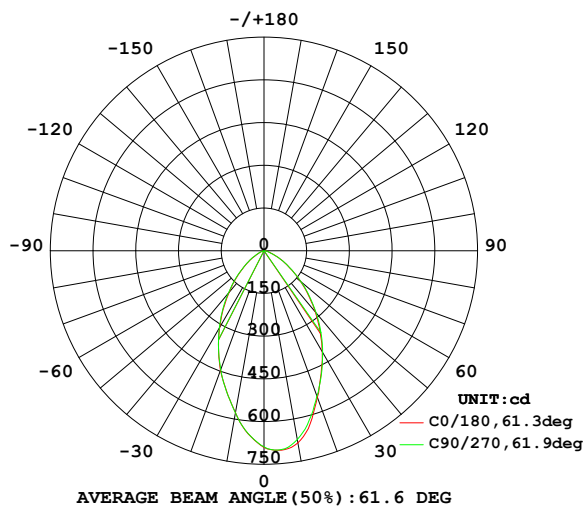

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

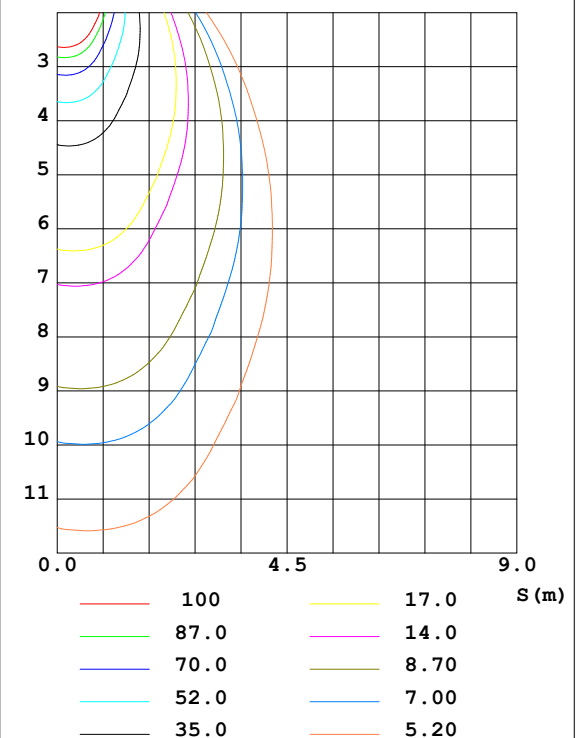


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	685.6	658.3	673.1	684.9	577.7	552.7	578.4	623.0	0- 10	62.93	62.93	7.1,7.1
20	548.0	524.2	543.6	568.3	446.8	445.4	444.8	433.1	10- 20	157.7	220.6	24.9,24.9
30	409.2	431.0	411.8	383.3	311.6	322.9	314.0	283.9	20- 30	194.7	415.4	46.9,46.9
40	280.6	307.9	285.3	249.4	191.1	207.9	195.1	174.8	30- 40	184.3	599.7	67.7,67.7
50	168.6	193.1	170.1	148.5	98.25	111.1	99.60	93.94	40- 50	141.2	740.9	83.6,83.6
60	84.28	103.5	84.77	73.93	38.24	51.17	40.49	37.39	50- 60	86.60	827.5	93.4,93.4
70	28.51	38.38	28.10	26.43	12.74	13.49	13.26	13.10	60- 70	39.58	867.1	97.9,97.9
80	8.383	8.767	7.921	7.257	1.247	1.342	1.366	1.342	70- 80	12.26	879.4	99.3,99.3
90	0.6793	0.6440	0.5805	0.5453	0.0742	0.0846	0.0741	0.0706	80- 90	1.742	881.1	99.5,99.5
100	0.0635	0.0740	0.0635	0.0635	0.1623	0.1834	0.1588	0.1447	90-100	0.1329	881.3	99.5,99.5
110	0.1657	0.1796	0.1585	0.1586	0.3315	0.3808	0.3315	0.2997	100-110	0.1848	881.5	99.5,99.5
120	0.3630	0.3948	0.3595	0.3314	0.6067	0.6736	0.6066	0.5396	110-120	0.3546	881.8	99.5,99.5
130	0.6590	0.7048	0.6625	0.6131	0.9768	1.051	0.9697	0.8886	120-130	0.5736	882.4	99.6,99.6
140	1.050	1.103	1.061	1.012	1.421	1.464	1.407	1.351	130-140	0.7845	883.2	99.7,99.7
150	1.502	1.526	1.523	1.498	1.904	1.929	1.886	1.830	140-150	0.9124	884.1	99.8,99.8
160	1.974	2.002	2.009	1.974	2.331	2.352	2.331	2.236	150-160	0.8868	885.0	99.9,99.9
170	2.387	2.404	2.408	2.358	2.602	2.630	2.588	2.581	160-170	0.6563	885.6	100,100
180	2.641	2.637	2.620	2.648	2.637	2.644	2.630	2.648	170-180	0.2449	885.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

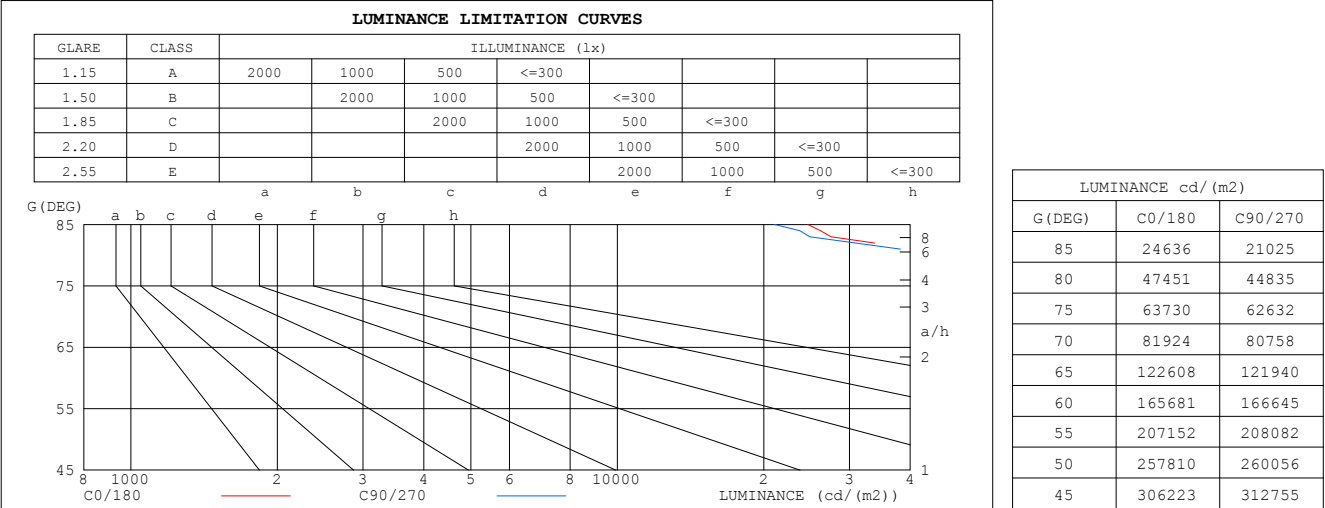


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.08	1.05	1.02	1.06	1.03	1.01	1.02	.99	.97	.98	.96	.94	.94	.93	.91	.90
2.0	.98	.93	.88	.96	.91	.87	.93	.89	.85	.89	.86	.83	.87	.84	.82	.80
3.0	.89	.83	.78	.87	.82	.77	.85	.80	.76	.82	.78	.74	.79	.76	.73	.71
4.0	.81	.74	.69	.80	.73	.68	.77	.72	.67	.75	.70	.66	.73	.69	.66	.64
5.0	.74	.67	.62	.73	.66	.61	.71	.65	.61	.69	.64	.60	.68	.63	.59	.58
6.0	.68	.61	.56	.67	.60	.55	.66	.59	.55	.64	.59	.54	.63	.58	.54	.52
7.0	.63	.56	.51	.62	.55	.50	.61	.55	.50	.59	.54	.50	.58	.53	.49	.48
8.0	.58	.51	.46	.58	.51	.46	.57	.50	.46	.55	.50	.46	.54	.49	.45	.44
9.0	.54	.47	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.40
10.0	.51	.44	.39	.50	.44	.39	.49	.43	.39	.48	.43	.39	.48	.43	.39	.37

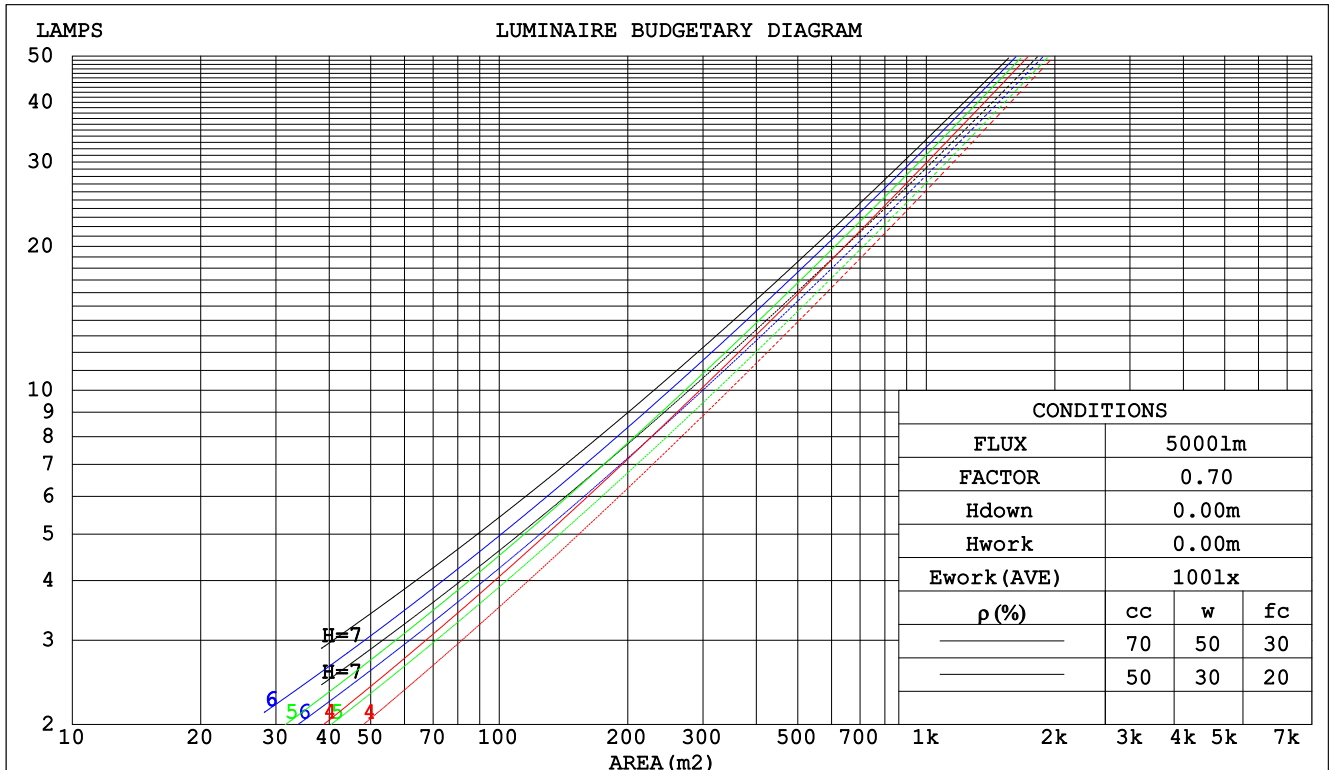

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm								
NAME: MAGIC-8W-SMD				TYPE:4000K			WEIGHT:	
DIM.:				SPEC.:			SERIAL No.:	
MFR.:				SUR.:			PROTECTION ANGLE:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.225	.128	.040	.218	.124	.039	.205	.117	.037	.193	.111	.036	.181	.105	.034		
2.0	.218	.120	.037	.212	.117	.036	.201	.112	.035	.191	.107	.033	.181	.102	.032		
3.0	.208	.111	.033	.203	.109	.033	.193	.104	.032	.184	.101	.031	.175	.097	.030		
4.0	.197	.102	.030	.192	.101	.030	.183	.097	.029	.175	.094	.028	.168	.091	.028		
5.0	.186	.095	.027	.182	.093	.027	.174	.091	.027	.167	.088	.026	.160	.086	.026		
6.0	.175	.088	.025	.172	.087	.025	.165	.085	.025	.159	.082	.024	.153	.080	.024		
7.0	.166	.082	.023	.163	.081	.023	.156	.079	.023	.151	.077	.022	.145	.076	.022		
8.0	.157	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	.139	.071	.021		
9.0	.149	.072	.020	.146	.071	.020	.141	.070	.020	.137	.069	.020	.132	.067	.019		
10.0	.141	.068	.019	.139	.067	.019	.135	.066	.019	.130	.065	.018	.126	.064	.018		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.195	.195	.195	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.179	.161	.145	.153	.138	.125	.104	.095	.086	.060	.055	.050	.019	.018	.016	
2.0	.167	.136	.111	.143	.117	.096	.098	.081	.067	.056	.047	.039	.018	.015	.013	
3.0	.157	.118	.087	.134	.102	.076	.092	.071	.053	.053	.041	.031	.017	.013	.010	
4.0	.148	.104	.070	.127	.090	.061	.087	.063	.043	.051	.037	.025	.016	.012	.008	
5.0	.140	.093	.058	.121	.080	.050	.083	.056	.036	.048	.033	.021	.016	.011	.007	
6.0	.133	.084	.049	.115	.073	.043	.079	.051	.030	.046	.030	.018	.015	.010	.006	
7.0	.127	.077	.042	.109	.067	.037	.076	.047	.026	.044	.028	.015	.014	.009	.005	
8.0	.121	.071	.037	.104	.062	.032	.072	.043	.023	.042	.026	.013	.014	.008	.004	
9.0	.116	.066	.032	.100	.057	.028	.069	.040	.020	.040	.024	.012	.013	.008	.004	
10.0	.111	.062	.029	.096	.054	.025	.066	.038	.018	.039	.022	.011	.013	.007	.004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

Uncorrected UGR Table

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm											
NAME: MAGIC-8W-SMD					TYPE:4000K			WEIGHT:			
DIM.:					SPEC.:			SERIAL No.:			
MFR.:					SUR.:			PROTECTION ANGLE:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	31.5	32.7	31.8	32.9	33.1	31.6	32.8	31.8	33.0	33.2	
	3H	31.8	32.9	32.1	33.2	33.4	31.9	33.0	32.1	33.2	33.4
	4H	31.9	32.9	32.2	33.1	33.4	31.9	32.9	32.2	33.2	33.4
	6H	31.8	32.8	32.2	33.1	33.4	31.9	32.9	32.2	33.1	33.4
	8H	31.8	32.8	32.1	33.0	33.3	31.8	32.8	32.2	33.1	33.3
	12H	31.8	32.7	32.1	33.0	33.3	31.8	32.7	32.1	33.0	33.3
4H	2H	31.8	32.8	32.1	33.1	33.3	31.8	32.9	32.1	33.1	33.4
	3H	32.2	33.1	32.5	33.4	33.7	32.2	33.1	32.6	33.4	33.7
	4H	32.3	33.1	32.6	33.4	33.7	32.3	33.1	32.7	33.4	33.8
	6H	32.3	33.0	32.7	33.4	33.7	32.3	33.1	32.7	33.4	33.8
	8H	32.3	33.0	32.7	33.3	33.7	32.3	33.0	32.7	33.3	33.7
	12H	32.3	32.9	32.7	33.2	33.7	32.3	32.9	32.7	33.3	33.7
8H	4H	32.2	32.9	32.7	33.3	33.7	32.3	32.9	32.7	33.3	33.7
	6H	32.3	32.9	32.8	33.3	33.7	32.3	32.9	32.8	33.3	33.7
	8H	32.3	32.8	32.8	33.2	33.7	32.3	32.8	32.8	33.2	33.7
	12H	32.3	32.7	32.8	33.1	33.6	32.3	32.7	32.8	33.2	33.6
12H	4H	32.2	32.8	32.6	33.2	33.6	32.2	32.8	32.7	33.2	33.6
	6H	32.3	32.8	32.8	33.2	33.7	32.3	32.8	32.8	33.2	33.7
	8H	32.3	32.7	32.8	33.1	33.6	32.3	32.7	32.8	33.2	33.6
Variations with the observer position at spacings:											
S = 1.0H	+ 0.8 / - 1.1					+ 0.8 / - 1.1					
1.5H	+ 0.3 / - 0.7					+ 0.3 / - 0.7					
2.0H	+ 1.3 / - 1.6					+ 1.3 / - 1.7					

CIE Pub.117 Corrected 885.9 lm Total Lamp Luminous Flux. (8log(F/F0) = -0.4)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Bob
 Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
 Humidity:65.0%
 Test Distance:7.030m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	71	62	56	70	62	56	69	61	56	51
0.80	81	72	66	80	71	66	78	71	66	60
1.00	88	80	74	87	79	74	85	80	73	68
1.25	94	86	81	93	85	81	90	84	80	74
1.50	98	91	86	96	90	85	94	88	84	78
2.00	103	97	92	101	96	91	98	93	90	83
2.50	105	100	96	103	98	95	100	96	93	86
3.00	108	103	99	106	101	98	102	98	96	88
4.00	110	106	103	108	105	102	104	101	99	91
5.00	112	109	106	110	107	104	106	103	101	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

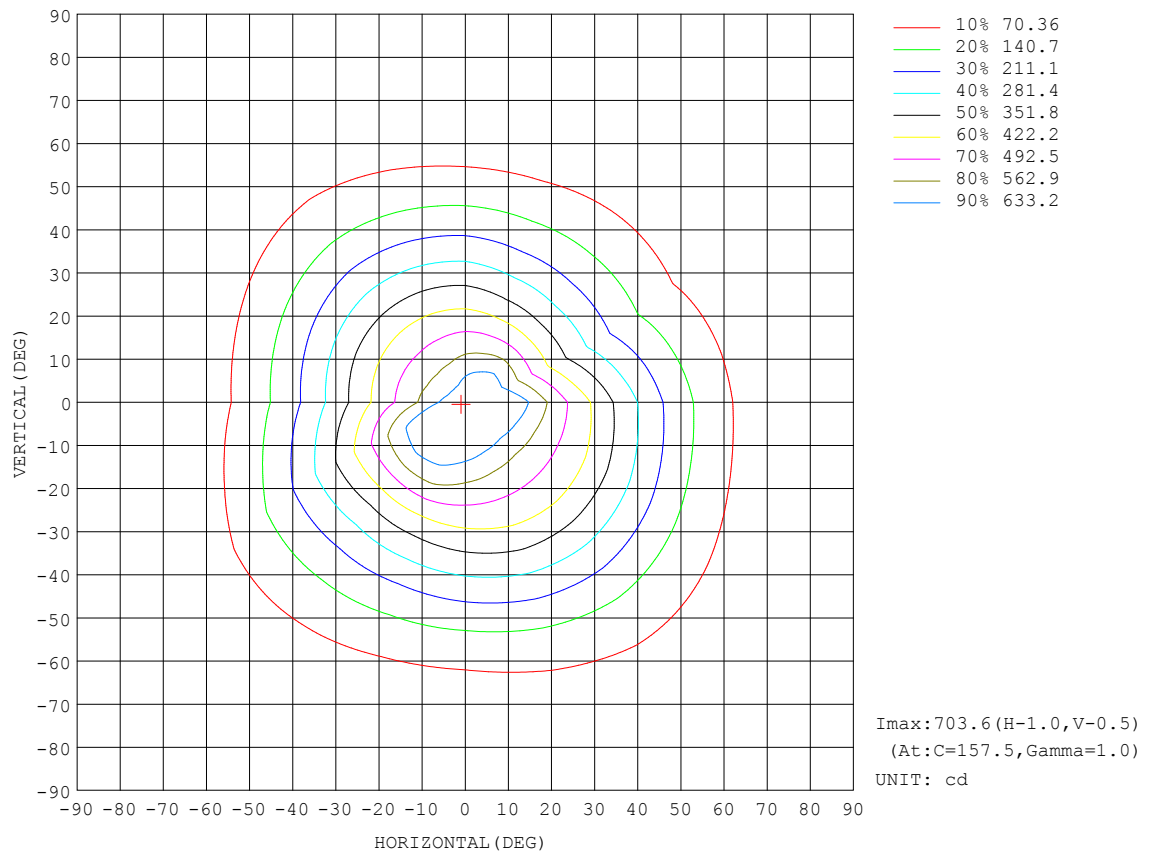


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

AAI CURVES

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

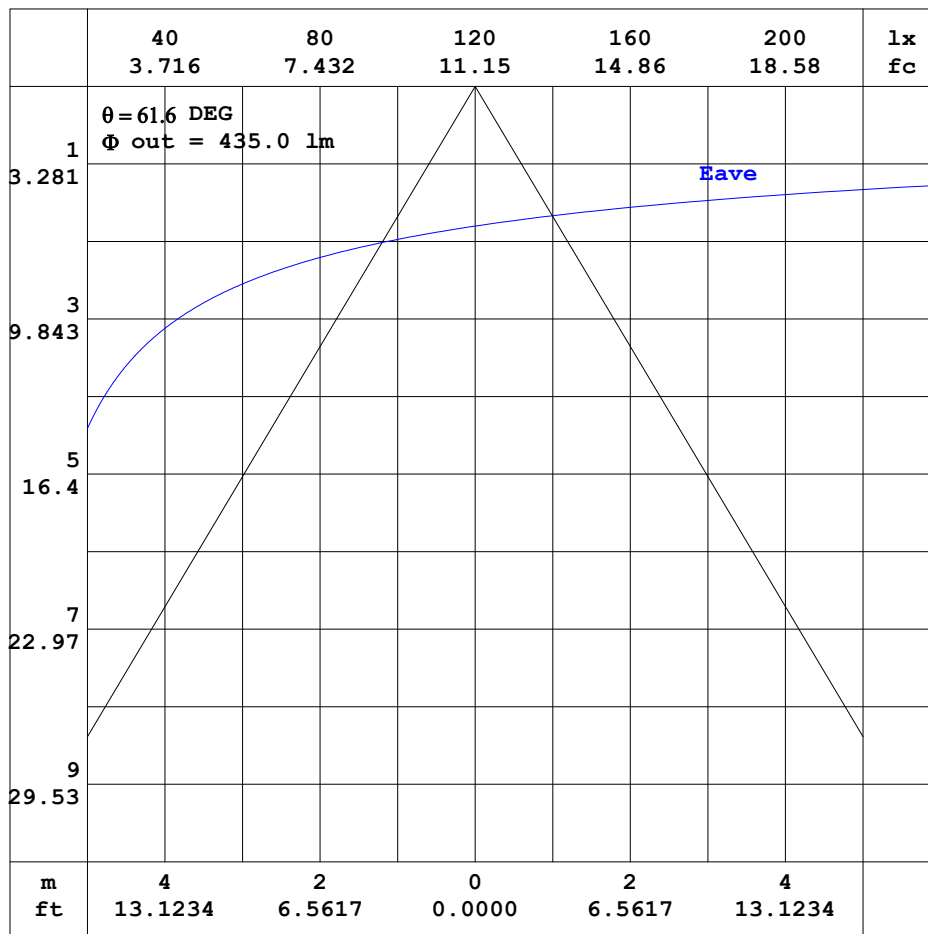


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm		
NAME: MAGIC-8W-SMD	TYPE:4000K	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

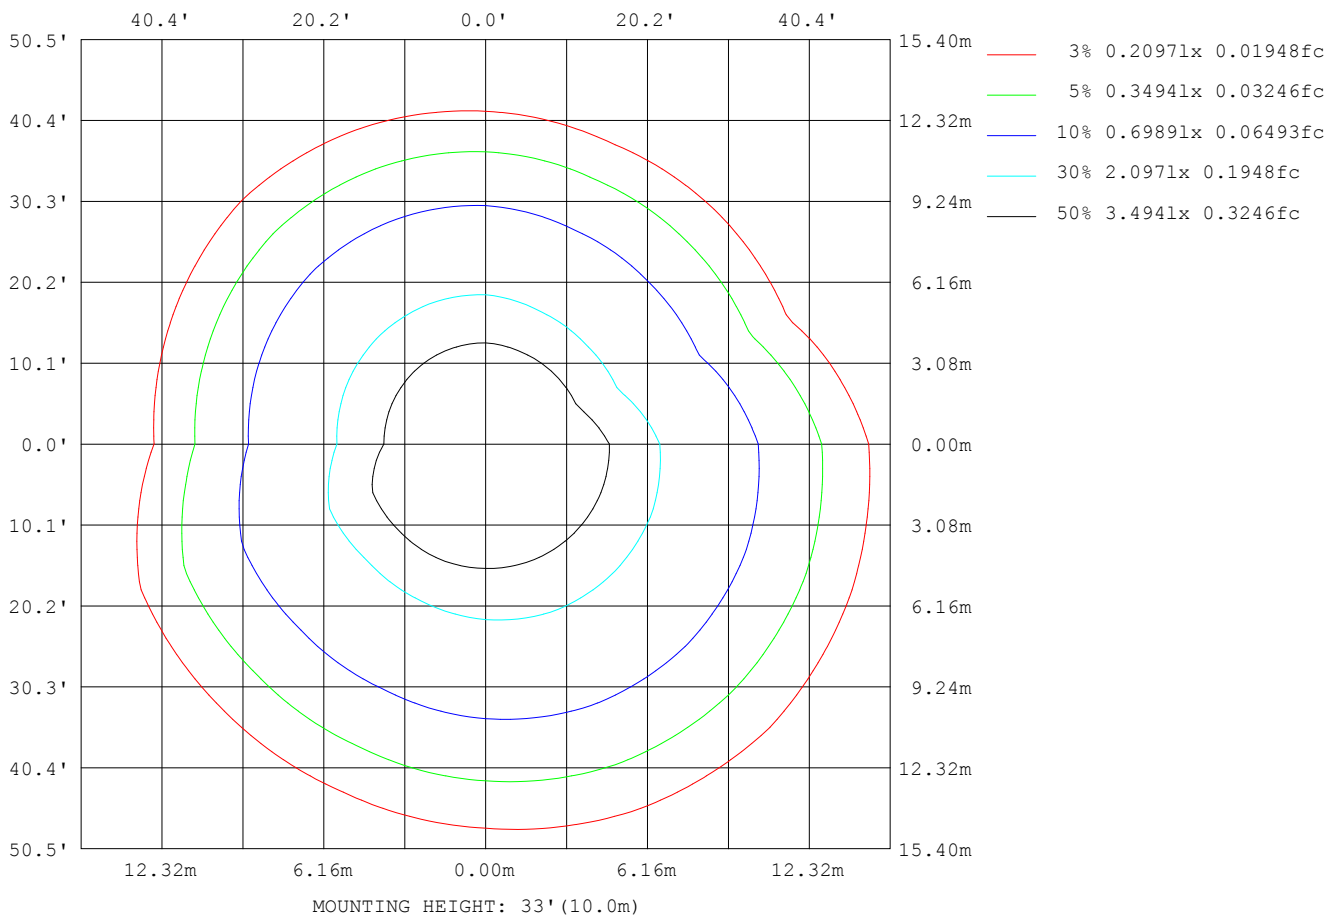

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks:

Planar Illuminance Curve

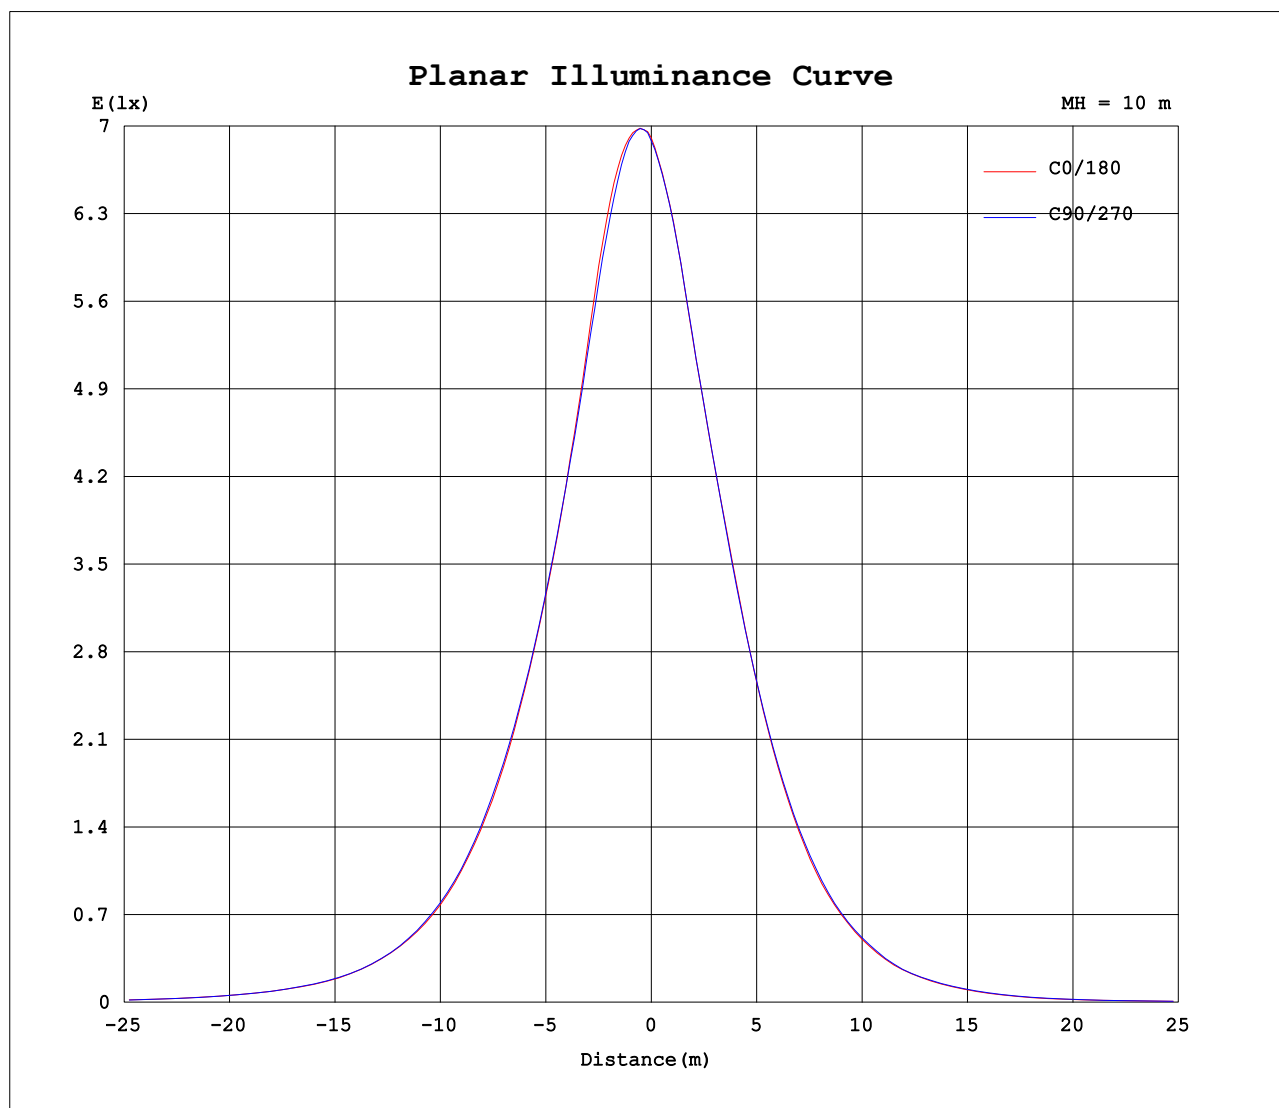

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Bob
Test Date: 2024-12-17

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity: 65.0%
Test Distance: 7.030m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.4V I:0.0381A P:7.992W PF:0.9053 Lamp Flux:885.866x1 lm																	
NAME: MAGIC-8W-SMD									TYPE:4000K						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:		
MFR.:									SUR.:						PROTECTION ANGLE:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	691	684	681	682	688	694	700	704	691	684	681	682	688	694	700	704			
5	703	702	701	700	700	698	699	699	645	624	619	623	644	664	683	686			
10	686	670	658	663	673	683	685	678	578	559	553	558	578	594	623	618			
15	628	601	585	596	615	643	650	632	510	502	499	502	511	517	529	527			
20	548	530	524	531	544	569	568	555	447	445	445	444	445	434	433	436			
25	475	479	481	480	477	477	469	471	379	385	386	383	378	359	352	357			
30	409	427	431	427	412	393	383	394	312	320	323	321	314	293	284	290			
35	343	366	371	368	348	324	310	322	249	258	264	260	253	233	226	231			
40	281	302	308	305	285	261	249	257	191	201	208	203	195	179	175	178			
45	220	242	250	244	225	204	196	199	142	151	157	153	146	134	132	133			
50	169	186	193	187	170	154	148	151	98.3	104	111	107	99.6	93.3	93.9	93.8			
55	121	134	141	136	121	112	109	110	65.8	73.1	80.0	75.1	67.8	61.0	62.1	62.1			
60	84.3	97.3	104	98.5	84.8	76.9	73.9	74.1	38.2	45.0	51.2	46.8	40.5	36.2	37.4	37.3			
65	52.7	63.3	68.8	63.9	52.4	46.8	45.7	45.4	21.1	23.4	26.0	24.4	22.0	20.8	21.9	21.5			
70	28.5	34.9	38.4	35.0	28.1	26.3	26.4	25.4	12.7	13.0	13.5	13.3	13.3	12.9	13.1	13.2			
75	16.8	17.7	17.7	17.6	16.5	16.1	15.7	15.6	4.19	4.29	4.70	4.49	4.49	4.21	4.37	4.34			
80	8.38	9.00	8.77	8.78	7.92	7.65	7.26	7.42	1.25	1.29	1.34	1.35	1.37	1.35	1.34	1.33			
85	2.18	2.27	2.14	2.11	1.86	1.88	1.78	1.89	0.14	0.18	0.20	0.22	0.25	0.25	0.26	0.25			
90	0.68	0.67	0.64	0.62	0.58	0.56	0.55	0.56	0.07	0.07	0.08	0.06	0.07	0.06	0.07	0.06			
95	0.06	0.08	0.07	0.08	0.06	0.07	0.06	0.07	0.11	0.09	0.12	0.09	0.11	0.06	0.10	0.06			
100	0.06	0.10	0.07	0.10	0.06	0.10	0.06	0.09	0.16	0.14	0.18	0.15	0.16	0.11	0.14	0.11			
105	0.10	0.14	0.12	0.14	0.10	0.13	0.11	0.13	0.23	0.22	0.26	0.22	0.23	0.18	0.21	0.17			
110	0.17	0.21	0.18	0.21	0.16	0.19	0.16	0.19	0.33	0.32	0.38	0.33	0.33	0.27	0.30	0.29			
115	0.25	0.30	0.27	0.30	0.27	0.27	0.24	0.27	0.46	0.45	0.52	0.46	0.46	0.39	0.41	0.37			
120	0.36	0.42	0.39	0.42	0.36	0.37	0.33	0.37	0.61	0.62	0.67	0.62	0.61	0.53	0.54	0.52			
125	0.50	0.55	0.54	0.56	0.50	0.50	0.45	0.50	0.78	0.80	0.85	0.80	0.78	0.70	0.70	0.69			
130	0.66	0.71	0.70	0.72	0.66	0.66	0.61	0.66	0.98	1.00	1.05	1.00	0.97	0.89	0.89	0.88			
135	0.85	0.90	0.89	0.90	0.85	0.84	0.80	0.84	1.20	1.22	1.26	1.21	1.19	1.11	1.11	1.10			
140	1.05	1.10	1.10	1.11	1.06	1.05	1.01	1.05	1.42	1.42	1.46	1.41	1.41	1.34	1.35	1.32			
145	1.28	1.32	1.30	1.33	1.29	1.28	1.25	1.29	1.66	1.66	1.69	1.64	1.64	1.59	1.60	1.57			
150	1.50	1.53	1.53	1.55	1.52	1.52	1.50	1.53	1.90	1.90	1.93	1.90	1.89	1.84	1.83	1.81			
155	1.74	1.77	1.76	1.78	1.77	1.77	1.75	1.78	2.13	2.13	2.15	2.13	2.12	2.06	2.04	2.04			
160	1.97	2.00	2.00	2.02	2.01	2.00	1.97	2.01	2.33	2.35	2.35	2.33	2.33	2.27	2.24	2.24			
165	2.19	2.22	2.22	2.25	2.23	2.21	2.18	2.22	2.49	2.50	2.52	2.48	2.47	2.43	2.41	2.41			
170	2.39	2.41	2.40	2.43	2.41	2.38	2.36	2.40	2.60	2.61	2.63	2.59	2.59	2.57	2.58	2.55			
175	2.53	2.55	2.55	2.57	2.52	2.52	2.52	2.56	2.67	2.66	2.68	2.65	2.66	2.65	2.68	2.65			
180	2.64	2.64	2.64	2.64	2.62	2.64	2.65	2.65	2.64	2.63	2.64	2.64	2.63	2.63	2.65	2.65			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Bob
Test Date:2024-12-17

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.270
Humidity:65.0%
Test Distance:7.030m [K=1.0000]
Remarks: